EQUIPMENT VENDOR WILL FURNISH & INSTALL THE FOLLOWING PLASTIC LAMINATE ITEMS.

(24) – OFFICE DESK TOP TO BE YELLOW METAL CRAFT WITH SELF–EDGE AND 3" BACK AND END SPLASH. TOP TO BE COMPLETE WITH WALL SUPPORT BRACKETS. 30" A.F.F.

(25) – NOT USED

(41) – 3/4"X12" SHELF WITH YELLOW METAL CRAFT ON ALL FACES. SHELF TO BE INSTALLED 72" ABOVE FINISH FLOOR WHERE SHOWN ON PLANS. FURNISH ALL REQUIRED MOUNTING BRACKETS.

(29) – 3/4"X6"X40" COAT HOOK STRIP WITH YELLOW METAL CRAFT ON FACE AND ALL EDGES. ATTACH 7 ALUMINUM COAT HOOKS SPACED EVENLY AND MOUNT 60" A.F.F.

(30) – 1"X3" CHAIR RAIL WITH YELLOW METAL CRAFT ON FACE AND BOTH EDGES. CUT TO LENGTH AND INSTALL 30" ABOVE FINISH FLOOR WHERE SHOWN ON PLANS.

(11) – 1"X6"X40" LONG CLIP BOARD STRIP WITH YELLOW METAL CRAFT ON FACE AND ALL EDGES. INSTALL 60" ABOVE FINISH FLOOR ON OFFICE WALL.

(33) – DRIVER'S DROP BOX HOLDER WITH YELLOW METAL CRAFT ON ALL FACES EXCEPT BOTTOM AND BACK.

(34) – 16"X18"X4 1/2" CASH DRAWER, FURNISH ALL HARDWARE AND INSTALL UNDER FRONT STEEL WORK TABLE.

NOTE:
CONTRACTOR TO INSTALL PLYWOOD BACKING BEHIND THE FOLLOWING ITEM'S #11, #24, #28, #29, #37, #51 AND CABINET IN MGR. OFFICE. IF CONTRACTOR DOES NOT INSTALL BACKING, THE CONTRACTOR BECOMES RESPONSIBLE FOR THOSE ITEMS SHOULD THEY FALL.

NOTES:

1. PIZZA OVEN TO BE MODEL PS–570 GAS FIRED CONVEYOR TYPE AS MANUFACTURED BY MIDDLEBY MARSHALL. OVENS ARE TO BE COMPLETE WITH EXHAUST CANOPY DUCTED TO ROOF MOUNTED EXHAUST FAN. DUCT TO BE INSULATED 24 GA. GALV. STEEL. PLUMBING CONTRACTOR TO FURNISH 2" GAS SUPPLY LINE TO OVENS WITH 3/4" GAS VALVES. E.V. TO FURNISH AND GENERAL CONTRACTOR TO INSTALL OVEN EXHAUST HOOD ABOVE OVENS.
2. MAKELINE TO BE MODEL PT–119 – COMPLETE WITH BUN PANS, INSTRUCTIONAL/TICKET TAKER HOLDER AND CASTERS AS MANUFACTURED BY VICTORY.
3. PIZZA CUTTING AND BOXING TABLE TO BE PER PLAN. STAINLESS STEEL COMPLETE WITH DBL. OVER SHELVES, TWO HEATED SHELVES, PAN HOLDER AND CASTERS. TABLE TO BE MANUFACTURED BY AIR SYSTEMS, INC.
4. GREASE INTERCEPTOR SEE SHEET P–1.
5. FLOOR SINK TO BE 24"X24" FIBERGLASS MODEL 2424 AS MANUFACTURED BY FLAT, INC. SINK SHALL HAVE MODEL 830– AA FAUCET AND 889 – COMOP STRAINER DRAIN.
6. PLUMBING CONTRACTOR TO MAKE ALL CONDENSATE DRAIN LINE CONNECTIONS FOR WALK–IN COOLER AND DROP–IN "KOLD PACK" REFRIGERATION UNIT. MECHANICAL CONTRACTOR TO INSTALL COMPRESSOR AND EVAPORATOR THEN DO FINAL CONNECTIONS
7. ELECTRICAL CONTRACTOR TO MAKE ALL REQUIRED ELECTRICAL CONNECTIONS FOR WALK–IN COOLER LIGHTING AND REFRIGERATION UNIT. ALSO HEAT UNITS ON CUT TABLE

RESPONSIBILITY:

E.V. – DENOTES EQUIPMENT VENDOR
GC – DENOTES GENERAL CONTRACTOR
EC – DENOTES ELECTRICAL CONTRACTOR
PC – DENOTES PLUMBING CONTRACTOR
FRAN – DENOTES FRANCHISEE
VENDOR – DENOTES LOCAL SUPPLIER

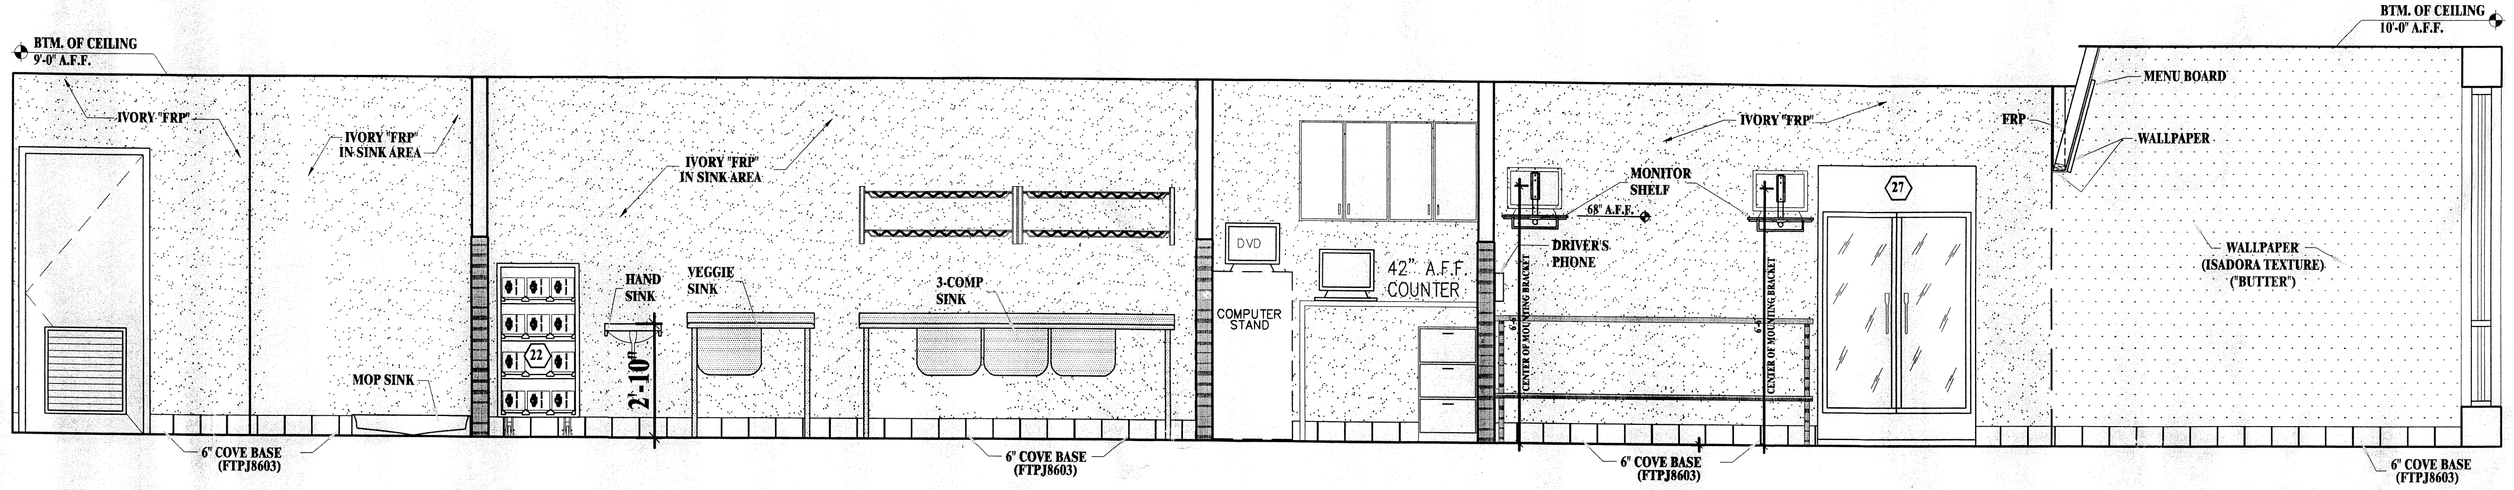

TYPICAL INTERIOR ELEVATION 1 / A-3

SCALE: 3/8" = 1'-0"

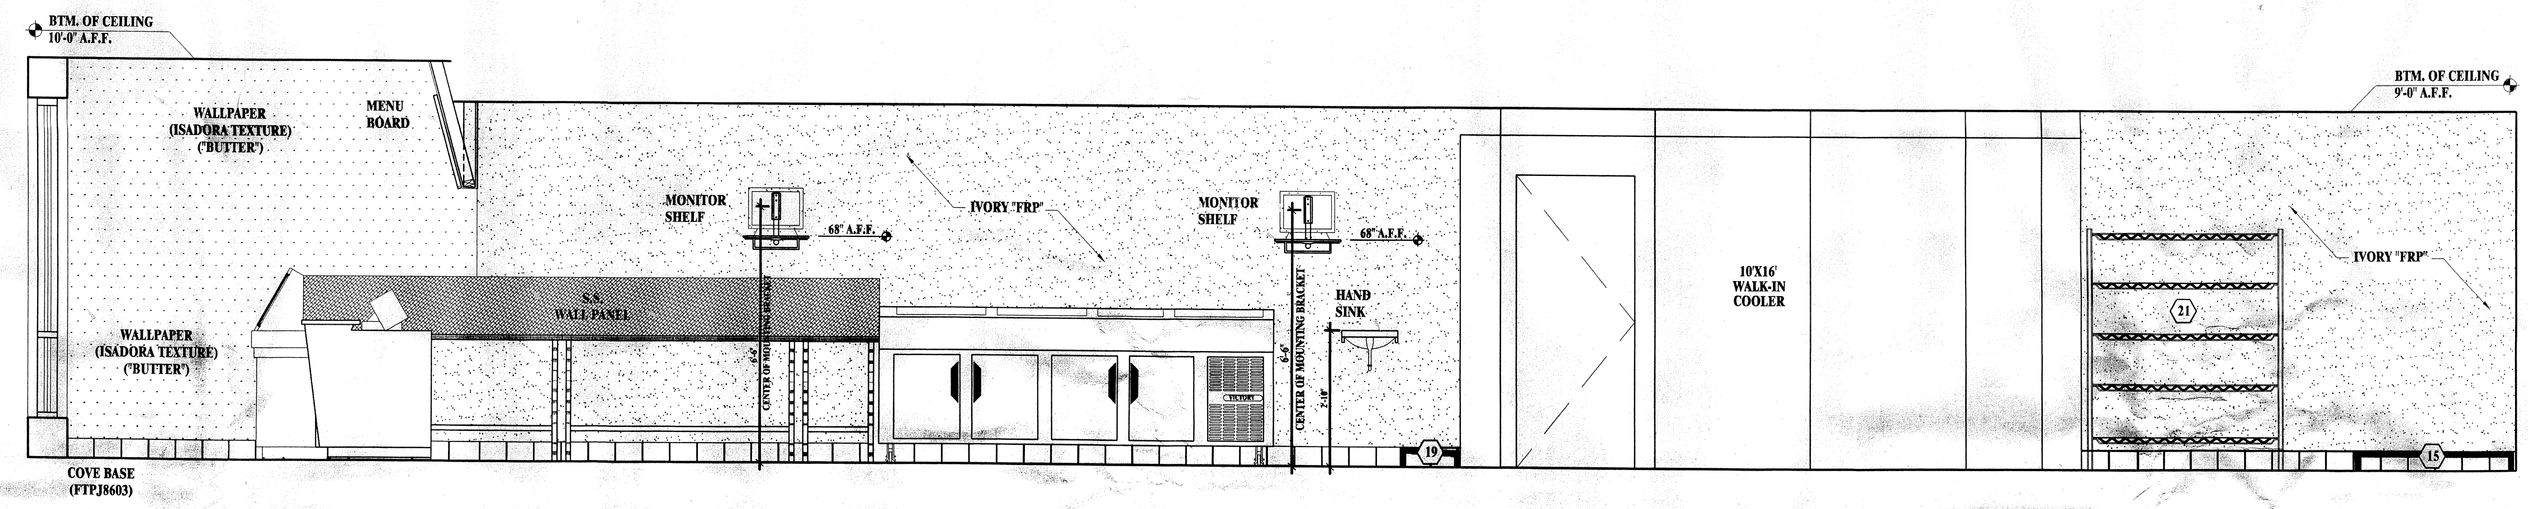

TYPICAL INTERIOR ELEVATION 2 / A-3

SCALE: 3/8" = 1'-0"

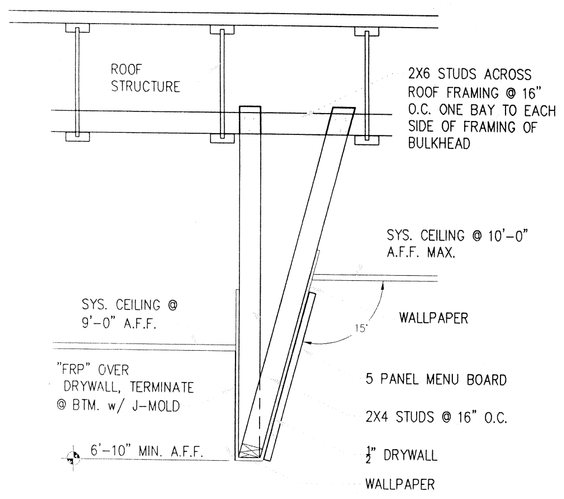

BULKHEAD DETAIL 3 / A-1

SCALE: 1/4" = 1'-0"

EQUIPMENT SCHEDULE

MK	DESCRIPTION OF ITEM	FURN.	INST.	REMARKS
1C	MIDDLEBY MARSHALL MODEL PS–555 PIZZA OVEN			SEE NOTE # 1
1D	MIDDLEBY MARSHALL MODEL PS–570 PIZZA OVEN			MEA# 73-04-E
2	OVEN HOOD	E.V.	E.V.	
3	MAKELINE – VICTORY PT – 119– S – PJ	E.V.	E.V.	
4	48"X96" CUTTING/BOX TABLE W/ (2) HEAT SHELVES	E.V.	G.C./E.C.	
7A	24/30 STAINLESS STEEL SAUCE TABLE	E.V.	E.V.	SEE NOTE # 2
7	48/30 STAINLESS STEEL TABLE W/ S.S. SHELF	E.V.	E.V.	SEE NOTE # 3 & 7
7M	48/30 STAINLESS STEEL TABLE W/ MARINE EDGE	E.V.	E.V.	
8	60/30 STAINLESS STEEL TABLE W/ S.S. SHELF	E.V.	E.V.	
8M	60/30 STAINLESS STEEL TABLE W/ MARINE EDGE	E.V.	E.V.	
9	96/30 STAINLESS STEEL TABLE W/ S.S. SHELF	E.V.	E.V.	
9M	96/30 STAINLESS STEEL TABLE W/ MARINE EDGE	E.V.	E.V.	
10A	72/30 S.S.TABLE W/ SAFE CUT OUT IN S.S. SHELF	E.V.	E.V.	
10	72/30 STAINLESS STEEL TABLE W/ S.S. SHELF	E.V.	E.V.	
10M	72/30 STAINLESS STEEL TABLE W/ MARINE EDGE	E.V.	E.V.	
11	CLIP BOARD / DELI TICKET HOLDER	E.V.	E.V.	
12	WALK–IN COOLER (SEE PLAN FOR SIZE)	E.V.	E.V.	SEE NOTE # 6 & # 7
13	KOLD PACK SPLIT SYSTEM	E.V.	M.C.	SEE NOTE # 6 & # 7
14	RED 44 GAL. "RUBBERMAID" GARBAGE CAN W/ LID	E.V.	E.V.	
15	24" X 48" FLAT ALUMINUM DUNNAGE RACK	E.V.	E.V.	
16	96" (3) COMP. STAINLESS STEEL SINK W/ 18" D.B.	E.V. / PC	PC	
17	GREASE TRAP – JONESPEC GT–2700–20 40LBS	PC	PC	SEE NOTE # 4
18	FLOOR SINK–FLAT MODEL MBS 2424 FIBERGLASS	PC	PC	SEE NOTE # 5
19	18" X 48" ALUMINUM DUNNAGE RACK	E.V.	E.V.	
20	18" X 48" – (4) SHELF PLASTIC STORAGE UNIT	E.V.	E.V.	
21	18" X 60" – (4) SHELF ZINK STORAGE UNIT	E.V.	E.V.	
22	25" X 35" X 41" HIGH MOBILE S.S. CAN/RACK TABLE	E.V.	E.V.	
23	48" 2"X2" "FRP" CORNER GUARDS	E.V.	GC	
23A	48" 2"X2" STAINLESS STEEL CORNER GUARDS	E.V.	GC	
24	YELLOW PLASTIC LAMINATE DESK TOP	E.V.	E.V.	SEE DETAIL THIS SHT.
25	CUSTOMER TABLE – 30"X30" PLASTIC LAM.	E.V.	E.V.	METAL LEGS ON TABLE
26	CHROME LEGS, RED UPHOLSTERY CUSTOMER CHAIR	E.V.	E.V.	
27	CAN BEVERAGE COOLER AND DISPENSER	FRAN	VENDOR	
28	(2) 18" X 48" ZINC WIRE SHELVES W/ BRACKETS	E.V.	GC	MOUNT 72" A.F.F.
29	6" X 40" X 9" COAT HOOK STRIP W/ 7 HOOKS	E.V.	E.V.	MOUNT 60" A.F.F.
30	1" X 3" YELLOW PLASTIC LAMINATE CHAIR RAIL	E.V.	E.V.	MOUNT 30" A.F.F.
31	TELEPHONE SYSTEM	VENDOR	VENDOR	INSTALL PER SPECS.
32	(2) – DRAWER LETTER SIZE FILE CABINETS	FRAN	FRAN	BEIGE COLOR
33A	THROUGH WALL DRIVER'S DROP BOX HOLDER	E.V.	E.V.	
33B	RECESSED IN WALL DRIVER'S DROP BOX HOLDER	E.V.	E.V.	
34	LOCKING CASH DRAWER	E.V.	E.V.	UNDER FRONT COUNTER
35	15 LBS. DRY CHEMICAL FIRE EXTINGUISHER	E.V.	G.C.	COMPLETE W/ BRACKET
36	FLOOR MOUNTED TIME DELAY SAFE	E.V.	GC	
37	HAND SINK WALL MOUNTED	E.V / PC	PC	
38	BUBBLE FORK HOLDER	E.V.	E.V.	
39	MENUBOARD 60" X 210" X 3U"	E.V.	GC	
40	STAINLESS STEEL CONDIMENT HOLDER	E.V.		
41	3/4" X 12" RED PLASTIC LAM. SHELF W/ BRACKETS	E.V.	GC	MOUNT 72" A.F.F.
42	COOLER LIGHT	E.V.	E.C.	
43	ONE WAY WINDOW FROM OFFICE	GC	GC	
44	DRIVERS TELEPHONE	VENDOR	VENDOR	
45	CLOCK	E.V.	E.V.	
46	FLOUR SHIELD	E.V.	E.V.	
47	2" GAS LINE	PC	PC	
48	SPLASH GUARD	E.V.	GC	
49	COMMISSARY COMMUNICATION HOLDER	E.V.	E.V.	
50	EMPLOYMENT APPLICATION DEPOSIT	E.V.	E.V.	
51	COMPUTER MONITOR SHLEF	E.V.	E.V.	
52	VEGGIE SINK	E.V.	PC	
53	CHEESE RACK	E.V.	E.V.	
54	UNDER COUNTER REFRIGERATOR	E.V.	E.V.	
55	OFFICE CABINET (VERIFY LOCATION W/ OWNER)	E.V.	E.V.	
56	75 GAL. HOT WATER HEATER BY "AMERICAN PROLINE"	E.V.	E.V.	(ELEC.)

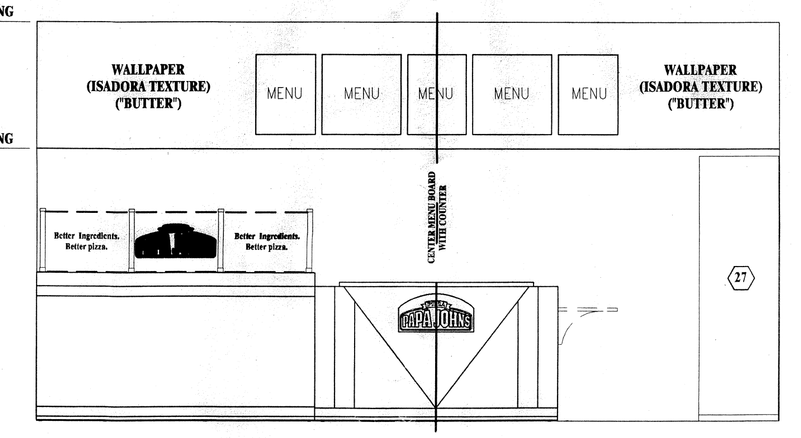

BULKHEAD ELEVATION 3 / A-3

SCALE: 3/8" = 1'-0"

JUL 03 2007
Approved Per OPEN-H/K Professional Certification

CHERICO KING ARCHITECT, P.C.
Registered Architect

86 YONKERS AVENUE
TUCKAHOE, NEW YORK, 10707
Tel: (914) 337-6800, Fax: (914) 337-3607
E-mail: c.king@chericoarchitects.com

VERSIONS

NO.	DATE	DESCRIPTION
01	2-26-07	ISSUED FOR BUILDING REVIEW
02	6-26-07	ISSUED FOR DOB FILING

GENERAL CONTRACTOR:

PAPA JOHN'S INTERNATIONAL, INC.
2002 PAPA JOHN'S BLVD.
LOUISVILLE, KENTUCKY 40299

CERTIFICATE OF AUTHORIZATION

REGISTERED ARCHITECT CHERICO KING NO. 025168 STATE OF NEW YORK

SIGNATURE AND SEAL

PROFESSIONAL LICENCE NUMBER

PROJECT LOCATION:

"PAPA JOHN'S PIZZA"
STORE RENOVATION
432 2nd Ave.
NEW YORK, NY 10010

PROJECT NUMBER	CK07-008
SCALE	AS NOTED
DATE	2/19/07
DRAWN BY	C.K.

DRAWING TITLE

INTERIOR ELEVATIONS & SCHEDULES

DRAWING NUMBER

A-3